

3M™ Print Wrap Film IJ280

Goes from 0 to wrapped, faster.

Meet our most technologically advanced film solutions ever:
3M™ Print Wrap Film IJ280 with 3M™ Gloss Wrap Overlaminate 8428G.

Experience the features and benefits

Step 1:

Remove the liner and slide the graphic over the surface to experience great slideability.



IJ280 utilizes technology that greatly reduces the "solvent effect," resulting in the same adhesive experience (tack, slideability, repositionability, etc.) before and after printing and laminating.

Step 2:

Feel the optimized initial tack that will make your installation easier.



IJ280 utilizes a new adhesive that is optimized for vehicle applications. This adhesive was designed to give a tack level high enough to trust to hold during installation while being easy enough to reposition or snap up if a mistake is made.

Step 3:

Apply the graphic on a curved surface (bumper, recess) and start at room temperature without applying extra heat. If needed apply extra heat with a heat-gun. This film needs very little heat to become highly conformable.




IJ280 with 8428G is our most conformable print wrap film. This means the film can conform more at room temperature allowing you to complete more of the installation with little or no additional heat.

Step 4:

Create trapped air when applying. Place your thumb or palm gently onto the bubble to warm it up and then remove the air by applying little pressure.



IJ280 utilizes 3M™ Comply™ v4 Air Release which is designed to give air flow in all directions while providing a smooth finish after application.

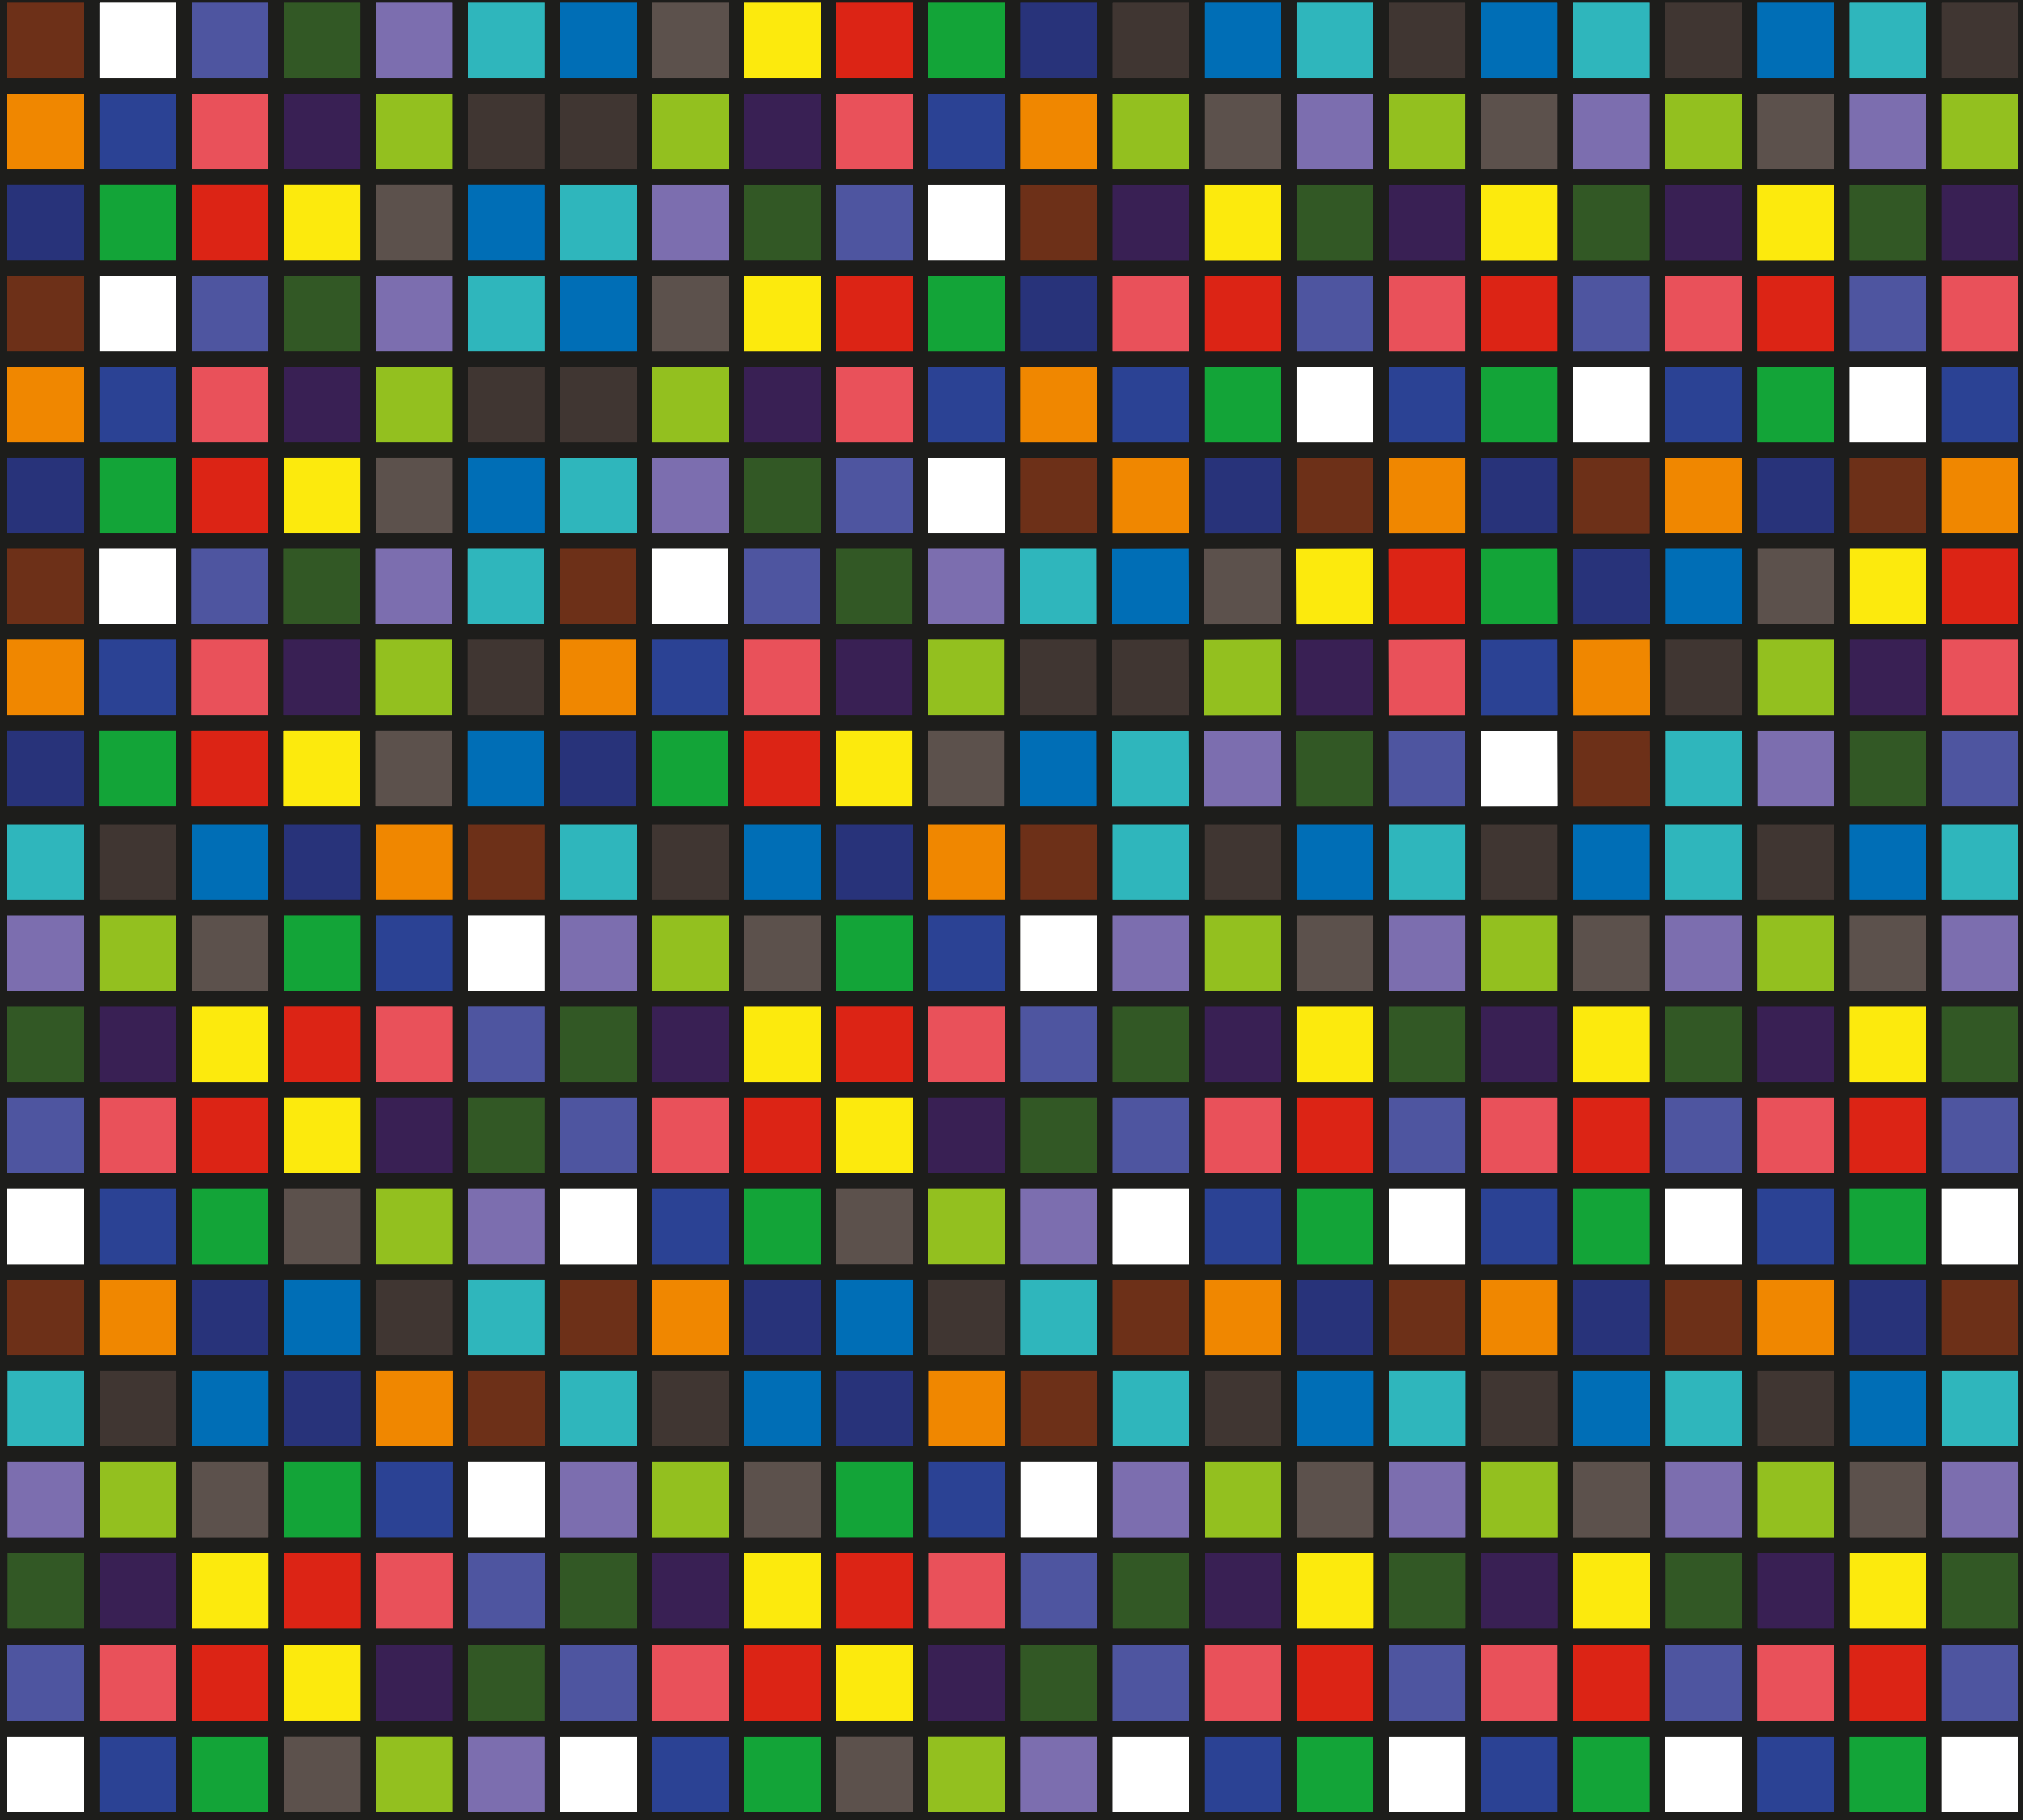

Wrap fast. Wrap fearlessly.
3M.com/IJ280