





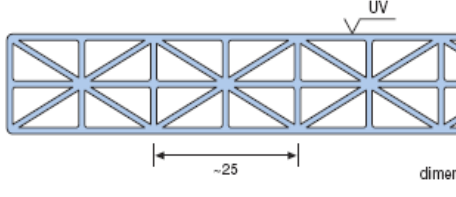
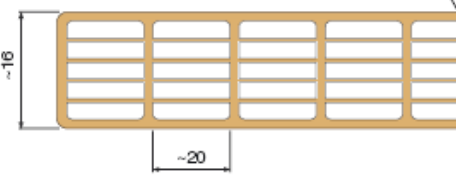
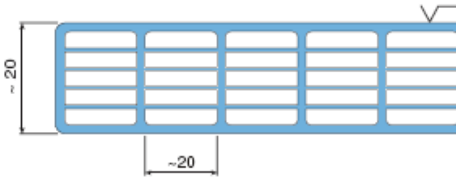
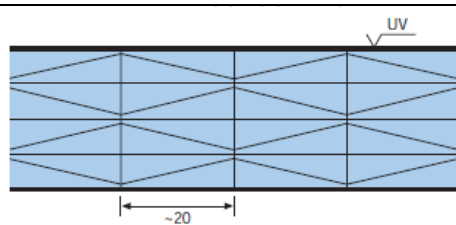
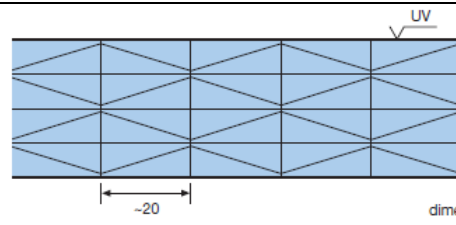
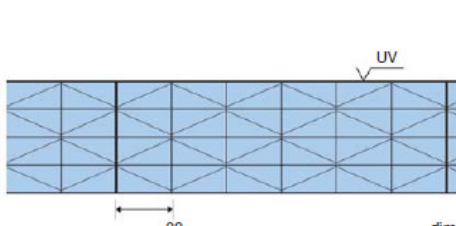


Löögikindel kihtplastik Makrolon Multi , PC polükarbonaat.

Toodete võrdlustabel.

MATERJALI RISTLÕIGE	Paksus	Kaal kg/m²	Soojusülekanne koefitsient (ASTM C 976/90) U_g	Valguse läbilaskvus LPV/OPA
	4 mm	0,8	4,1	79% / 64%
	6 mm	1,3	3,7	77% / 64%
	8 mm	1,5	3,6	79% / 65%
	10 mm	1,7	3,1	80% / 62%
	4-10 mm	1,7	2,5	68% / 61%
	16 mm	2,8	2,4	74% / 51%

	5x-16 mm	2,5	2,0	66% / 46%
	6-16 mm	2,8	1,82	59% / 42%
	6-20 mm	3,1	1,67	58% / 45 %
	5M-25 mm	3,4	1,3	49% / 40%
	5M - 32 mm	3,7	1,1	48% / 38%
	5M - 40 mm	4,2	1,0	49%/40%

LPV – läbipaistev OPA – piimjas

Detailsema info saamiseks saab toodete tehnilised andmed alla laadida aadressilt

[http://www.proplastik.ee/makrolon-\(pc\)](http://www.proplastik.ee/makrolon-(pc))

Proplastik OÜ

www.proplastik.ee